

KL-852YB / KL-852MY

雙主軸Y軸 / 單主軸(附尾座)Y軸 車銑複合機

TWIN-SPINDLES Y-AXIS / SINGLE-SPINDLE (with tailstock) Y-AXIS
MULTI-TASKING CNC LATHE




		KL-852YB	KL-852MY
正主軸 Main Spindle	鼻端型式 Spindle Nose	A2-6	
	拉桿通孔直徑 (mm) Hole through draw tube (mm)	Ø 52 mm (可選配 Ø 65 mm) (Optional: Ø 65 mm)	
	主軸馬達功率 Spindle Motor Output	7.5 / 9 kW	
副主軸 Sub. Spindle		副主軸 Sub. Spindle	可程式尾座 Programmable Tailstock
	鼻端型式 Spindle Nose	A2-5	MT#4
	拉桿通孔直徑 (mm) Hole through draw tube (mm)	Ø 45 mm	N/A
	主軸馬達功率 Spindle Motor Output	5.5 / 7.5 kW	N/A
刀塔 Turret	品牌 Brand	義大利 Diplomatic Diplomatic Automation	
	刀具數 No. of Tool Stations	16T 動力刀塔 16T Powered Turret	
	驅動馬達 Indexing Drive	FANUC α2 主軸馬達 2.2 / 3.7 kW FANUC α2 Spindle Motor 2.2 / 3.7 kW	
	刀具規格 Tool Holder Size	VDI-30 徑向 DIN69880, VDI-30 Radial	
	傳動齒 Tool Coupling Type	DIN-5480	
行程 (mm) Axis Travel (mm)	X	150 mm	
	Y	±50 mm	
	Z	426 mm	
B		副主軸 Sub. Spindle	可程式尾座 Programmable Tailstock
		630 mm	454 mm
控制器 Controller		Fanuc 0i-TF / 10.4" LCD	

K2-52SY

雙主軸雙Y軸 車銑複合機

TWIN-SPINDLES TWIN Y-AXES MULTI-TASKING CNC LATHE

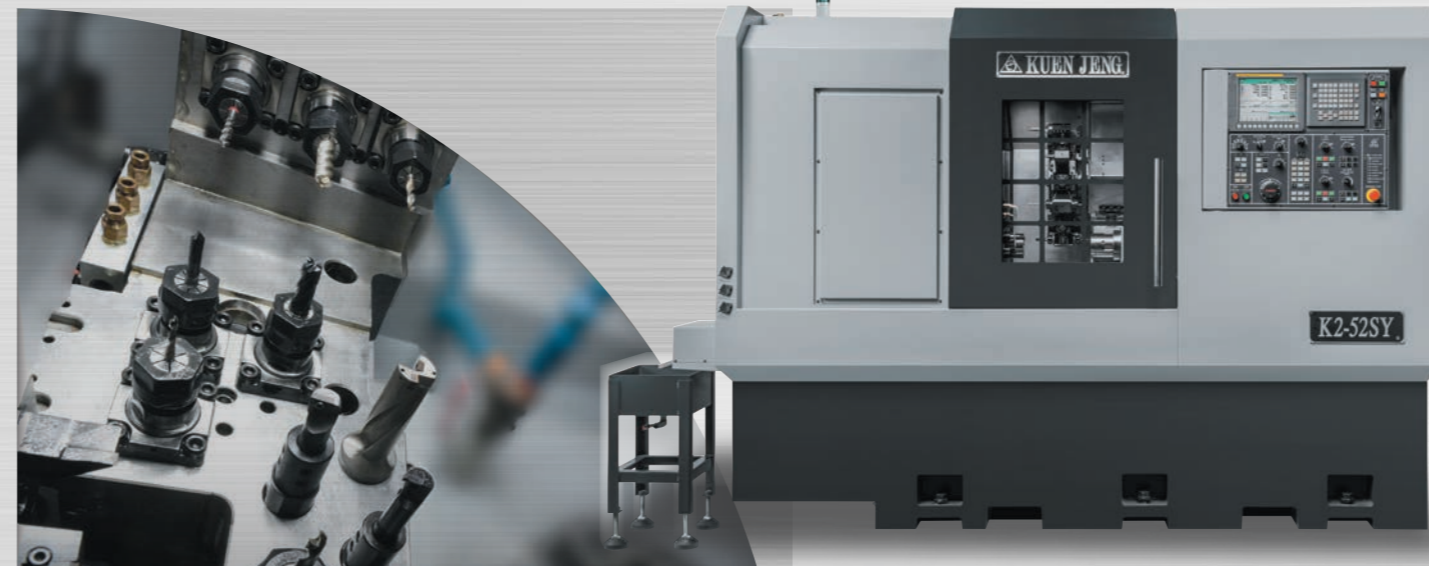

		Head1	Head2
主軸 Spindle	鼻端型式 Spindle Nose	A2-6	A2-5
	拉桿通孔直徑 (mm) Hole through draw tube (mm)	Ø 52 mm (可選配 Ø 65 mm) (Optional: Ø 65 mm)	Ø 28 mm (西德 42型筒夾) (Din6343 173E)
	主軸馬達功率 Spindle Motor Output	7.5 / 9 kW	2.2 / 3.7 kW
刀塔 Turret	品牌 Brand	義大利 Diplomatic Diplomatic Automation	櫥式刀具 Gang Type Tooling System
	刀具數 No. of Tool Stations	16T 動力刀塔 16T Powered Turret	外徑:3 O.D. Turning:3 內徑:5 I.D. Turning:5 端面動力:3 Axial Live Tooling:3 側面動力:3 Radial Live Tooling:3
	驅動馬達 Indexing Drive	FANUC α2 主軸馬達 2.2 / 3.7 kW FANUC α2 Spindle Motor 2.2 / 3.7 kW	FANUC α2 伺服馬達 1.4 kW FANUC α2 Servo Motor 1.4 kW
	刀具規格 Tool Holder Size	VDI-30 徑向 DIN69880, VDI-30 Radial	N/A
行程 (mm) Axis Travel (mm)	傳動齒 Tool Coupling Type	DIN-5480	N/A
	X	141 mm	262 mm
	Y	±40 mm	150 mm
Z	400 mm	390 mm	
控制器 Controller		Fanuc 0i-TF / 10.4" LCD	




新田廠 Xintian Factory
427002 台中市潭子區豐興路二段338巷10-2號
No. 10-2, Ln. 338, Sec. 2, Fengxing Rd., Tanzi Dist., Taichung City 427002
TEL: 886-4-2536-9498 . 886-4-2536-0213
E-mail: sales@kuen-jeng.com.tw
FAX: 886-4-2536-7405

聚興廠 Juxing Factory
427019 台中市潭子區潭興路一段165巷6號
No. 6, Ln. 165, Sec. 1, Tanxing Rd., Tanzi Dist., Taichung City 427019
TEL: 886-4-2536-7350 . 886-4-2537-4028
E-mail: kuen.jeng@outlook.com
FAX: 886-4-2537-9832

本公司持續改進，規格如有變動恕不另行通知，敬請查詢。
Continuously improving, specifications may change without prior notice, please inquire.



www.kuen-jeng.com.tw

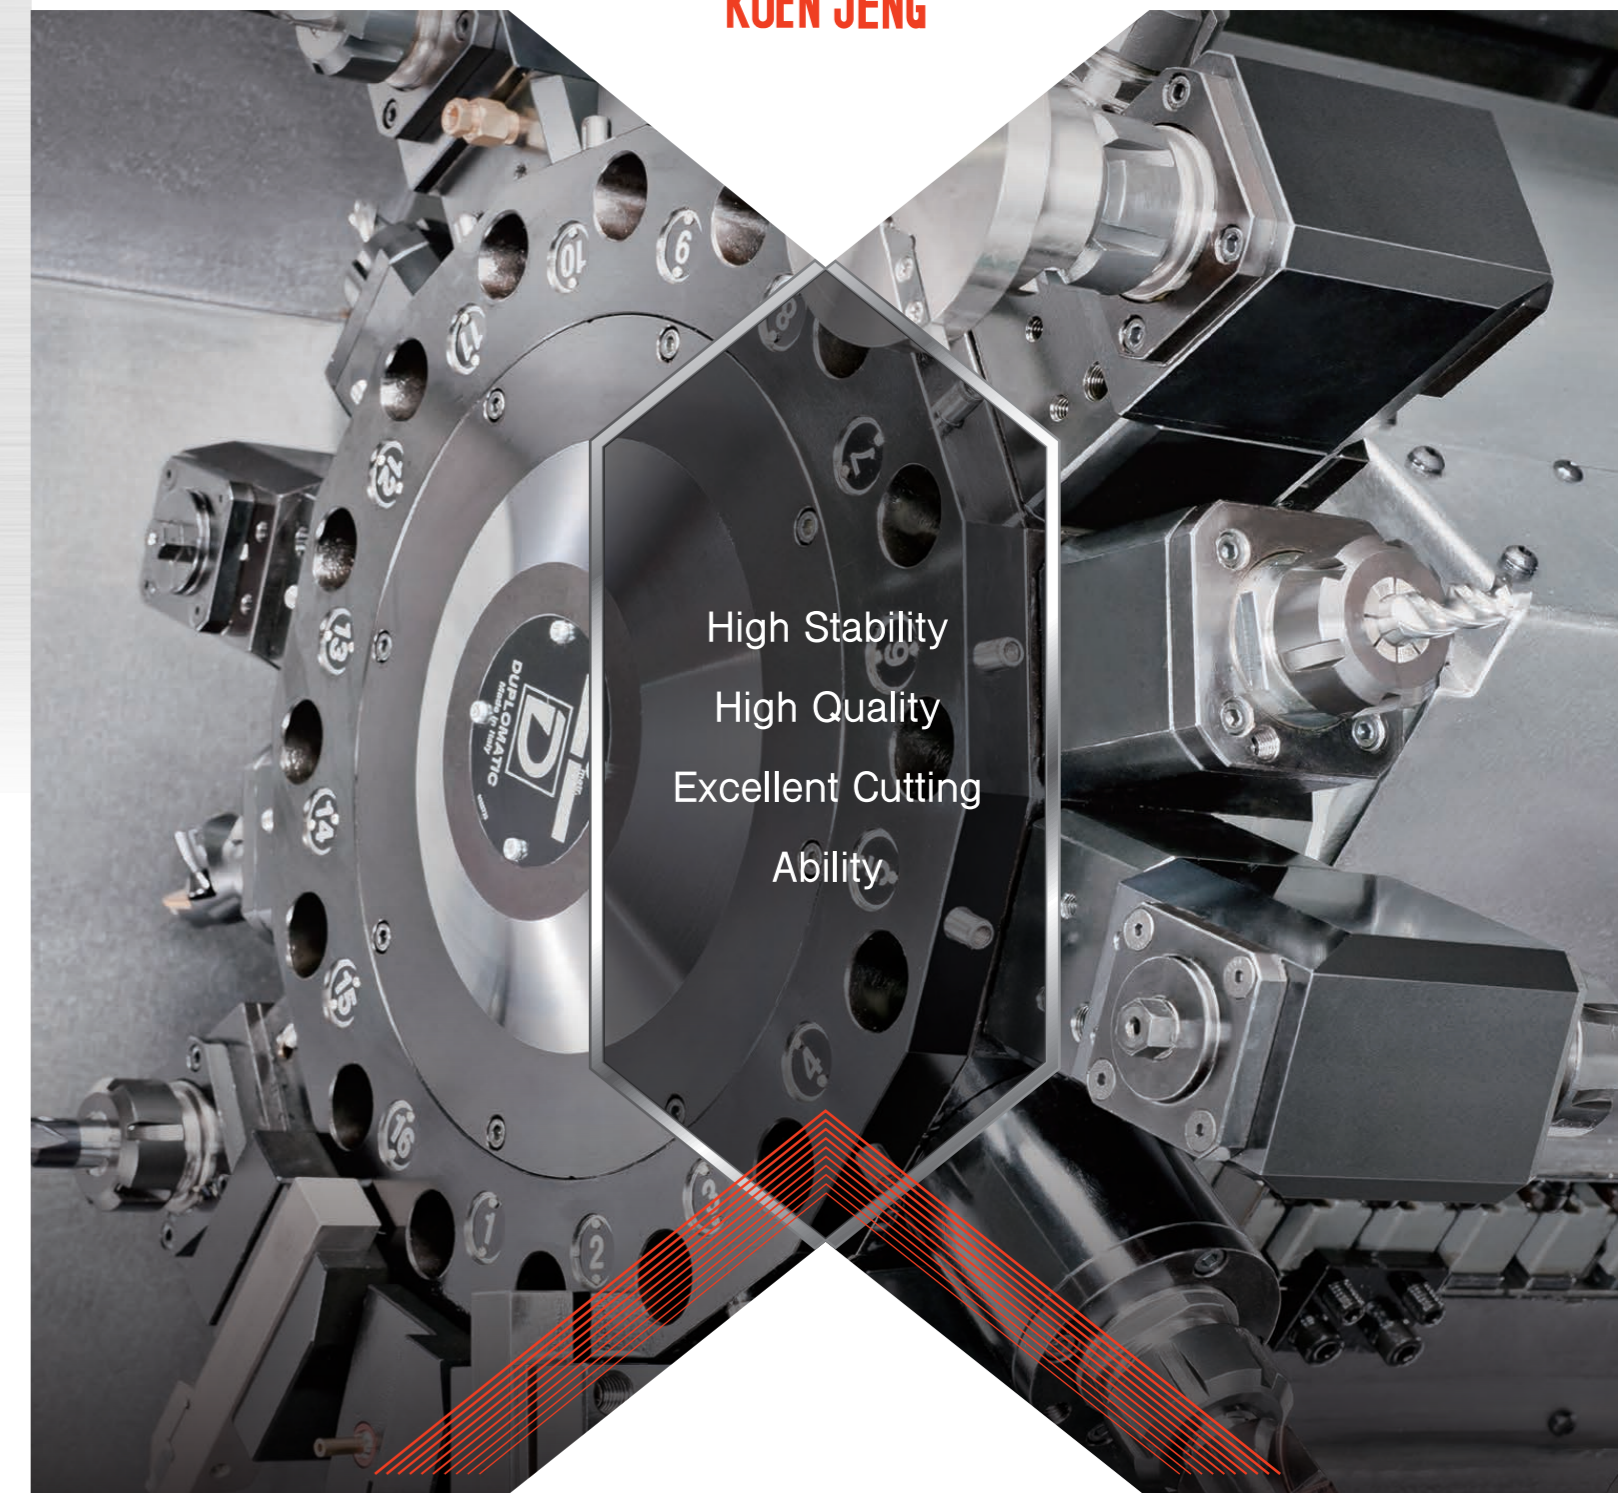

High Stability
High Quality
Excellent Cutting
Ability.

高穩定性 / 高品質 / 卓越切削能力

創新研發 ▲ 追求卓越
Innovate Develop
Pursue Excellence



KL-852 / KL-852M

臥式車床 車銑複合機

HORIZONTAL LATHE / MULTI-TASKING CNC LATHE

		KL-852	KL-852M
主軸 Spindle	鼻端型式 Spindle Nose	A2-6	
	拉桿通孔直徑 (mm) Hole through draw tube (mm)	Ø 52 mm (可選配 Ø 45 mm 或 Ø 65 mm) Ø 52 mm (Optional: Ø 45 mm or Ø 65 mm)	
	主軸馬達功率 Spindle Motor Output	7.5 / 9 kW	
刀塔 Turret	品牌 Brand	六鑫 Lio Shing Turret	義大利 Diplomatic Diplomatic Automation
	刀具數 No. of Tool Stations	8T、10T、12T 油壓刀塔 (可選配伺服刀塔) 8T, 10T, 12T Hydraulic Cam Type Turret (Optional: Servo Turret)	12T 動力刀塔 12T Powered Turret
	驅動馬達 Indexing Drive	N/A	FANUC α2 主軸馬達 2.2 / 3.7 kW FANUC α2 Spindle Motor 2.2 / 3.7 kW
	刀具規格 Tool Holder Size	N/A	VDI-30 軸向 DIN69880, VDI-30 Axial
	傳動齒 Tool Coupling Type	N/A	DIN-5480
可程式尾座 Programmable Tailstock	頂心規格 Morse Taper Live Center	MT#4	
	行程 (mm) Travel (mm)	341 mm	
行程 (mm) Axis Travel (mm)	X	163 mm	211 mm
	Z	406 mm	
控制器 Controller	Fanuc 0i-TF / 8.4" LCD		



KL-SY2

雙系統雙Y軸雙刀塔 車銑複合機

TWIN-SPINDLES TWIN Y-AXES TWIN-TURRETS MULTI-TASKING CNC LATHE

		Head1	Head2
主軸 Spindle	鼻端型式 Spindle Nose	A2-6	
	拉桿通孔直徑 (mm) Hole through draw tube (mm)	Ø 52 mm (可選配 Ø 65 mm) (Optional: Ø 65 mm)	Ø 52 mm
	主軸馬達功率 Spindle Motor Output	7.5 / 9 kW	5.5 / 7.5 kW
刀塔 Turret	品牌 Brand	義大利 Diplomatic Diplomatic Automation	
	刀具數 No. of Tool Stations	16T 動力刀塔 16T Powered Turret	
	驅動馬達 Indexing Drive	FANUC α3 主軸馬達 3.7 kW FANUC α3 Spindle Motor 3.7 kW	
	刀具規格 Tool Holder Size	VDI-30 徑向 DIN69880, VDI-30 Radial	
	傳動齒 Tool Coupling Type	DIN-5480	
行程 (mm) Axis Travel (mm)	X1/X2	200 mm	
	Y1/Y2	±50 mm	
	Z1/Z2	550 mm	
B		N/A	530 mm
	控制器 Controller	Fanuc 31i / 15" LCD	

KL-20

高剛性硬軌車床

HIGH RIGIDITY BOX WAY LATHE



		KL-20	KL-20
主軸 Spindle	鼻端型式 Spindle Nose	A2-6	頂心規格 Morse Taper Live Center MT#4
	拉桿通孔直徑 (mm) Hole through draw tube (mm)	Ø 52 mm (可選配 Ø 45 mm 或 Ø 65 mm) (Optional: Ø 45 mm or Ø 65 mm)	行程 (mm) Travel (mm) 410 mm
	主軸馬達功率 Spindle Motor Output	7.5 / 9 kW	最大車削長度 Max. turning length 470 mm
刀塔 Turret	品牌 Brand	六鑫 Lio Shing Turret	行程 (mm) Axis Travel (mm) X 170 mm
	刀具數 No. of Tool Stations	8T、10T、12T 油壓刀塔 8T, 10T, 12T Hydraulic Cam Type Turret	Z 580 mm
	控制器 Controller	Fanuc 0i-TF / 8.4" LCD	

KL-1078

高剛性硬軌車床

HIGH RIGIDITY BOX WAY LATHE



		KL-1078	KL-1078
主軸 Spindle	鼻端型式 Spindle Nose	A2-8	頂心規格 Morse Taper Live Center MT#5
	拉桿通孔直徑 (mm) Hole through draw tube (mm)	Ø 78 mm	行程 (mm) Travel (mm) 615 mm
	主軸馬達功率 Spindle Motor Output	15 / 18.5 kW	最大車削長度 Max. turning length 720 mm
刀塔 Turret	品牌 Brand	六鑫 Lio Shing Turret	行程 (mm) Axis Travel (mm) X 240 mm
	刀具數 No. of Tool Stations	8T、10T、12T 油壓刀塔 (可選配 Diplomatic 12T 動力刀塔) 8T, 10T, 12T Hydraulic Cam Type (Optional: Diplomatic 12T Powered Turret)	Z 750 mm
	控制器 Controller	Fanuc 0i-TF / 8.4" LCD	