


機台規格 TOOL SPECIFICATION	K2-52	K2-52SY
控制器 CONTROLLER	FANUC Oi-TF / 10.4" LCD	
刀塔 Turret	12T油壓刀塔 Hydraulic turret	Duplomatic VDI 30/16位動力刀塔 16-position Duplomatic VDI 30 power turret.
外徑刀座規格 O.D. Tools	Ø20 mm	Ø20 mm
擴刀座規格 Milling Tool Base	Ø32 mm	Ø32 mm
主軸馬達功率 Spindle Motor	α15 IP / 5 / 9 kw	α15 IP / 5 / 9 kw
主軸最高轉速 Max. Spindle Speed	3500 rpm	3500 rpm
副主軸馬達功率 Sub- spindle Motor Rate	α2 / 2.2 kw	α2 / 2.2 kw
副主軸最高轉速 Max. Sub- spindle Speed	3500 rpm	3500 rpm
伺服馬達規格 Servo Motors	X1=1.6 kw X2=1.6kw Z1=3 kw Z2=3 kw Y1=1.6 kw Y2=1.6 kw M2=1.4 kw	
最大加工長度 Max. Turning Length	390 mm	390 mm
最大拉桿通孔直徑 Max. Hole Through Spindle Diameter	52 mm	52 mm
最大加工直徑 Max. Turning Diameter	Ø348 mm	Ø230 mm
正面軸向行程 Travel Of Front Axis	X1=280 Z1=400	X1=280 Z1=400 Y1= ±40
背面軸向行程 Travel Of Rear Axis	X2=550 Z2=390 Y2=±75	X2=550 Z2=390 Y2=±75
機台尺寸(長x寬x高) Machine Dimension (LxWxH)	2720x2100x1937 mm	2720x2100x2008 mm
重量 Weight	7000 kg	7300 kg

※尺寸規格若有變動恕不另行通知

佔地面積圖

Dimensions Of Machine

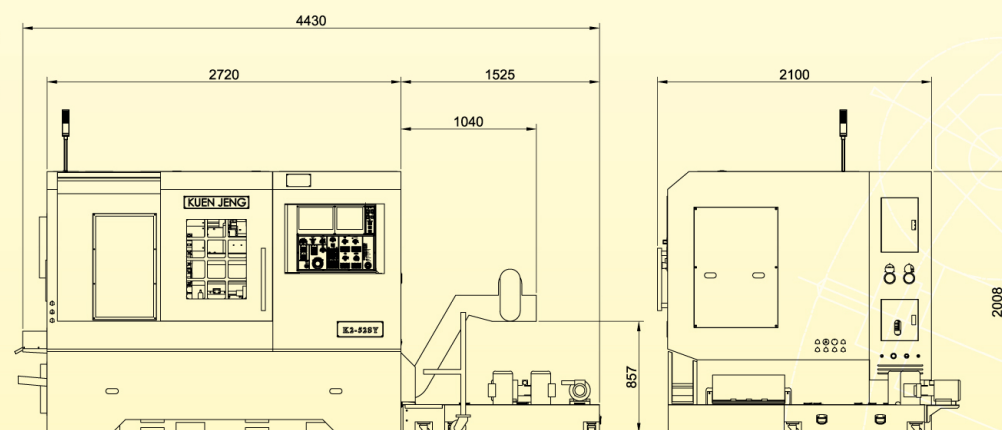

K2-52SY


雙主軸 / 單刀塔 /
雙Y軸CNC車床
Twin Spindle / Single Turret /
Double Y-axis CNC Lathe



坤鈺機械股份有限公司
KUEN JENG MACHINERY CO., LTD.

42742台中市潭子區豐興路2段338巷10-2號
No.10-2, Ln. 338, Sec. 2, Fengxing Rd., Tanzi Dist., Taichung City 42742, Taiwan
TEL: 886-4-2536-9498 E-mail: sales@kuen-jeng.com.tw
FAX: 886-4-2536-7405 www.kuen-jeng.com.tw

經銷商 Agent

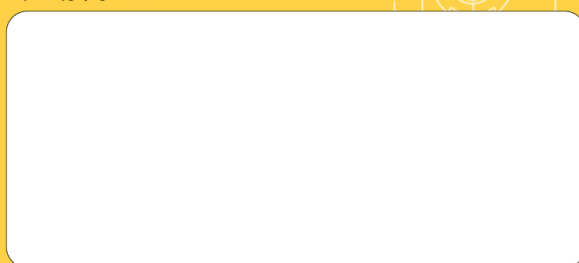

**High Accuracy, Versatile,
An Extra Value Series!**

